

LOW POWER NARROW BAND FM IF


■ GENERAL DESCRIPTION

The **NJM3357** includes Oscillator, Mixer, Limiting Amplifier, Quadrature Discriminator, Active Filter, Squelch Scan Control, and Mute Switch. The **NJM3357** is designed for use in FM dual conversion communication equipment.


■ FEATURES

- Low Operating Current (3.0mA typ. @V⁺=6V)
- Minimum other parts.
- Package Outline DIP16, DMP16
- Bipolar Technology

■ PACKAGE OUTLINE




NJM3357D




NJM3357M

■ PIN CONFIGURATION

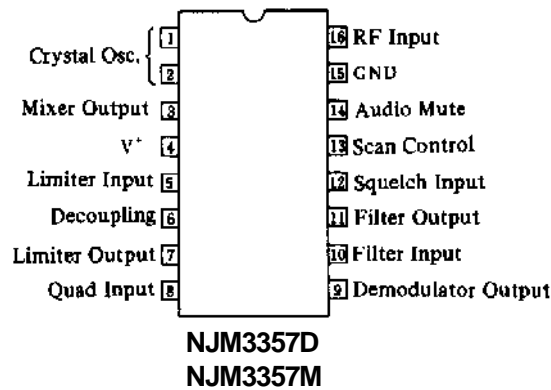

■ BLOCK DIAGRAM

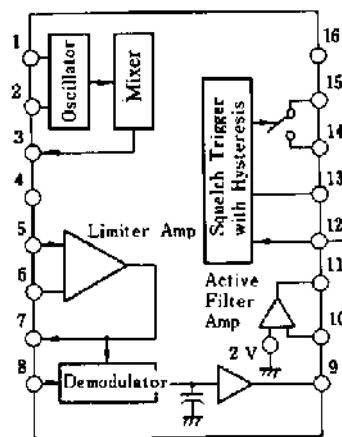

NJM3357D
NJM3357M

NJM3357

■ ABSOLUTE MAXIMUM RATINGS

($T_a=25^\circ\text{C}$)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	12	V
Operating Supply Voltage Range	V^+_{opr}	4 to 8	V
Detector Input Voltage	V_8	1.0	V_{P-P}
Input Voltage ($V^+ \geq 6V$)	V_{16}	1.0	V_{rms}
Mute Function	V_{14}	- 0.5 to + 5.0	V_{PK}
Power Dissipation	P_D	DIP16	700
		DMP16	300
Operating Temperature Range	T_{opr}	- 40 to + 85	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 40 to + 125	$^\circ\text{C}$

■ ELECTRICAL CHARACTERISTICS

($V^+=6V$, $f_o=10.7\text{MHz}$, $\Delta f=\pm 3.0\text{kHz}$, $F_{mod}=1.0\text{kHz}$, $T_a=25^\circ\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	PIN	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{CC}	Squelch OFF	4	-	2.0	-	mA
		Squelch ON		-	3.0	5.0	mA
Input Limiting Voltage	V_{LIM}	-3dB Limiting	16	-	5.0	10.0	μV
Detector Output Voltage	V_{DET}		9	-	3.0	-	V
Detector Output Impedance	R_{DET}		-	-	400	-	Ω
Recovered Audio Output Voltage	V_O	$V_{IN}=10\text{mVrms}$	9	200	350	-	mVrms
Filter Gain	G_F	$f=10\text{kHz}$, $V_{IN}=5\text{mVrms}$	-	40	46	-	dB
Filter Output Voltage	V_F		11	1.8	2.0	2.5	V
Trigger Hysteresis	H_{YST}		-	-	100	-	mV
Mute Function Low	Mute		14	-	15	50	Ω
Mute Function High			14	1.0	10	-	M Ω
Scan Function Low		Mute OFF, $V_{12}=2V$	13	-	0	0.5	V
Scan Function High	V_{SCAN}	Mute ON, $V_{12}=0V$	13	5.0	-	-	V
Mixer Conversion Gain	G_C		3	-	20	-	dB
Mixer Input Resistance	R_{IN}		16	-	3.3	-	k Ω
Mixer Input Capacitance	C_{IN}		16	-	2.2	-	pF

■ TEST CIRCUIT

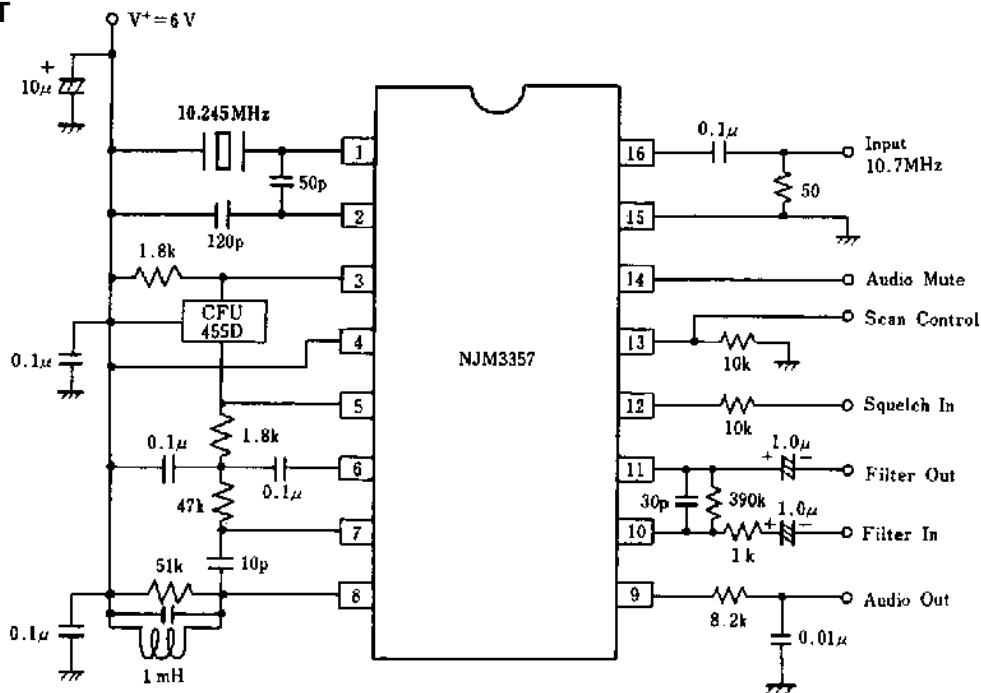


1mH: TOKO IFP455B


■ TYPICAL CHARACTERISTICS

Input - Output

($V^+ = 6.0V$, $f_{in} = 10.7MHz$, $f_{mod} = 1kHz$,
 $\Delta f = \pm 3kHz$)

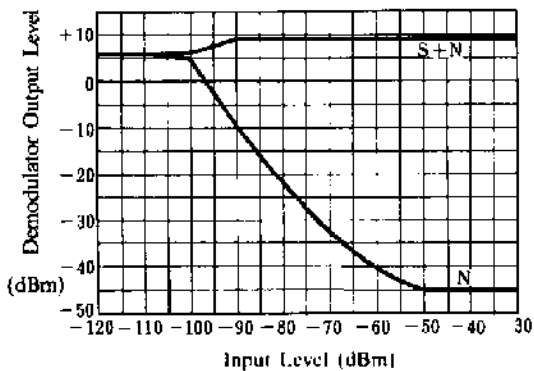


Local OSC Frequency

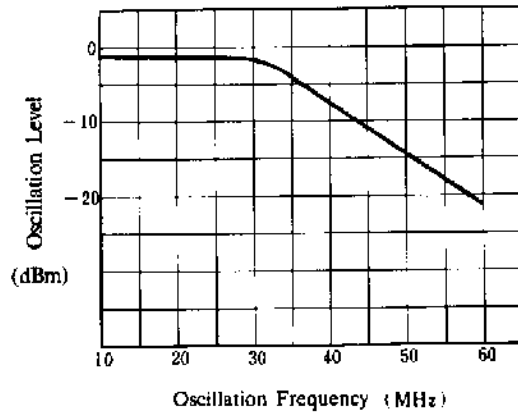


Mixer Input - Output

($V^+ = 6.0$, $f_{in} = 10.7MHz$, 2nd IF = 455kHz)

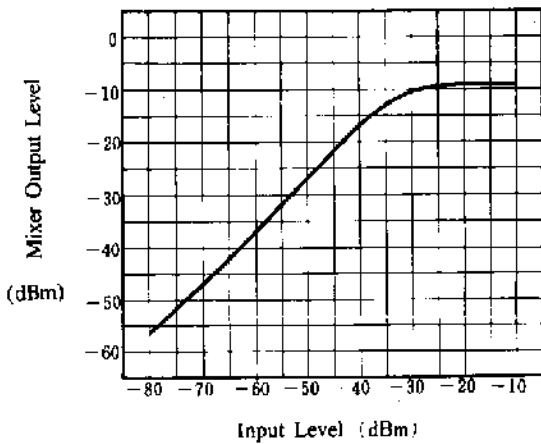


Demodulator Output Level

($f_{in} = 10.7MHz$, $V_{in} = 10mV_{rms}$,
 $\Delta f = \pm 3kHz$, $f_{mod} = 1kHz$)

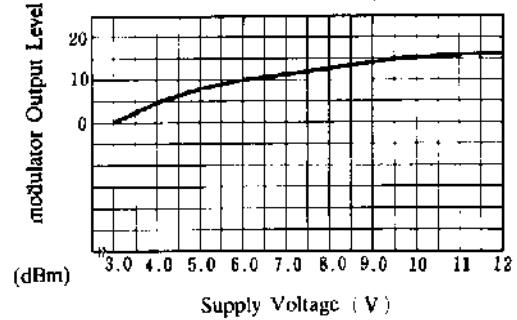

Demodulator Output Level, S/N

($V^+ = 6.0V$, $f_{in} = 10.7MHz$, $V_{in} = 10mV_{rms}$,
 $f_{mod} = 1kHz$, $\Delta f = \pm 3kHz$)

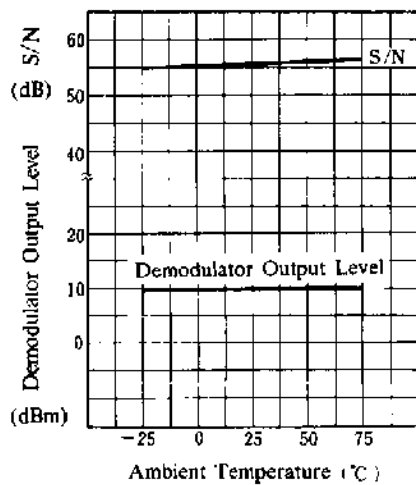

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.