

F





E

D

C

B

A

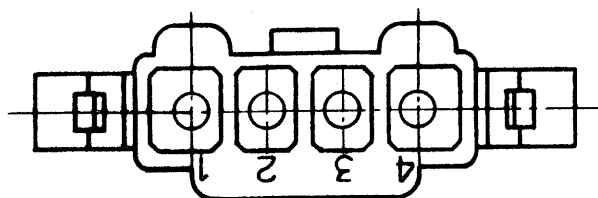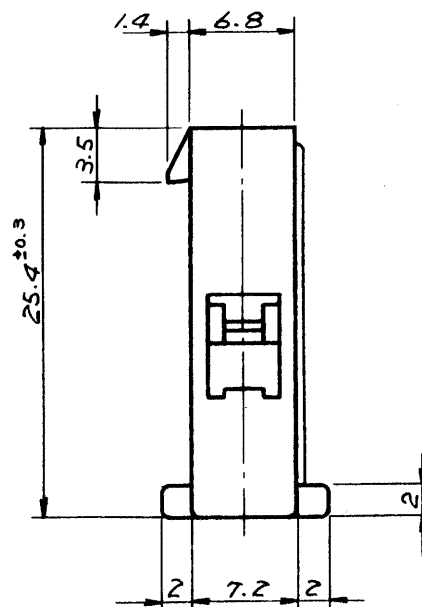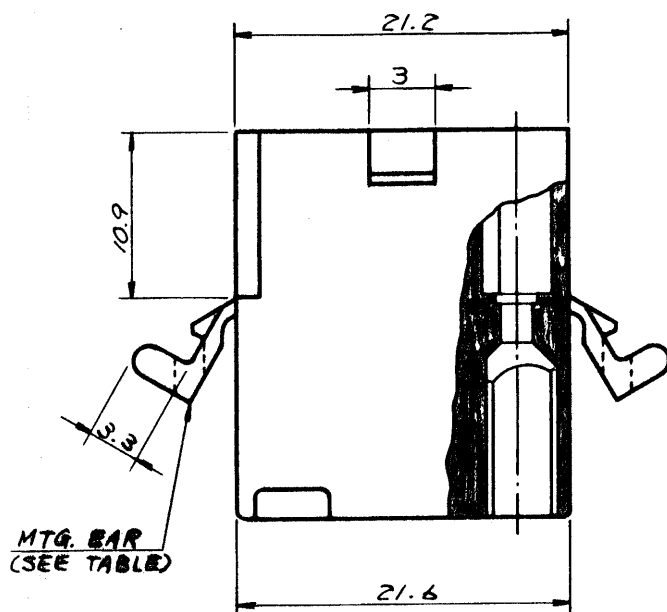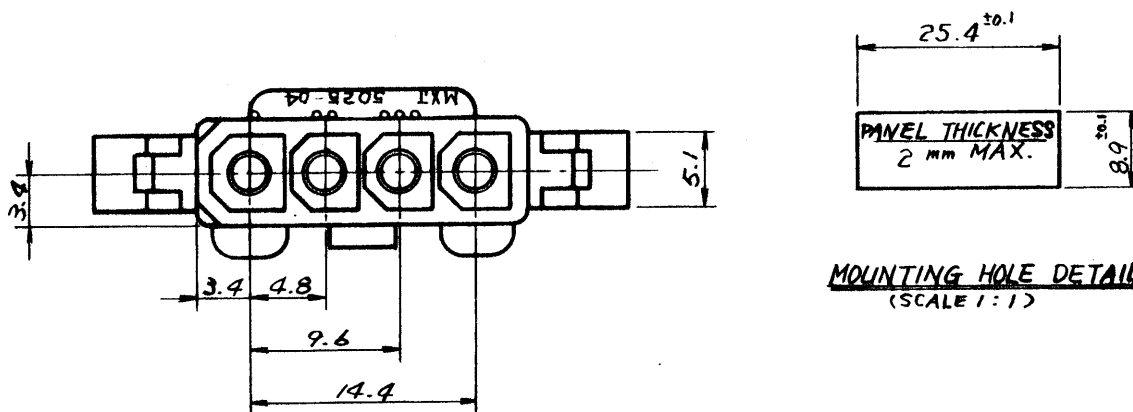

GENERAL TOLERANCES

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±3°

	5025-04P1	NO
	5025-04P	YES
EDP NO.	ENG. NO.	MTG. EAR

			公差 (Tolerances)		所要数 (Req)	DRWG. <u>Y. Awano</u> 9/27/77 DSN'D <u>M. EANO/MTO</u> 9/21/77 CHK'D <u>M. Shino</u> APP'D
			.000 → ±0.005 .00 → ±0.05 .0 → ±0.1 . → ±0.3			
			材料 (MAT'L) NYLON 66, 94V-2		★ MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	No. <u>SD-5025-04P*</u> REV. <u>D</u>
			熱処理 (H.T.) HRc <u>— # —</u>			
			仕上げ (Finish) <u>— # —</u>		名称 (Name) MINI. FIT CONN. 4POS. PLUG HSG.	
			Scale <u>2/1</u>			
			変更内容 (Rev.)			
			Date Name			
記号 LTR						
D	ADDED -04P1 ECN NO. 917	9/8/78	4/1			
C	REMOVED "X" ECN NO. 748	7/6/78	8/1			
B	リブ、パネルスロット、サキット NO.	12/9/77	4/2			
A	REVISED	10/28/77	4/2			
O	PROPOSED	9/27/77	4/1			

D

ADDED -04P1 ECN NO. 917 9/27/77 Y.A.

C

REMOVED "X" ECN NO. 748 9/21/77 M.E.

B

リブ、パネリスロット、サキット NO. 13/1/77 Y.A.

A

REVISED 10/28/77 Y.A.

O

PROPOSED 9/27/77 Y.A.

記号
LTR

変更内容 (Rev.)

Date

Name

Scale
2/1

名称 (Name)

MINI. FIT CONN. 4POS. PLUG HSG.

No.

SD-5025-04P*

REV.

D

5



4

3

2

1

F

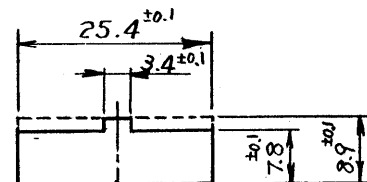
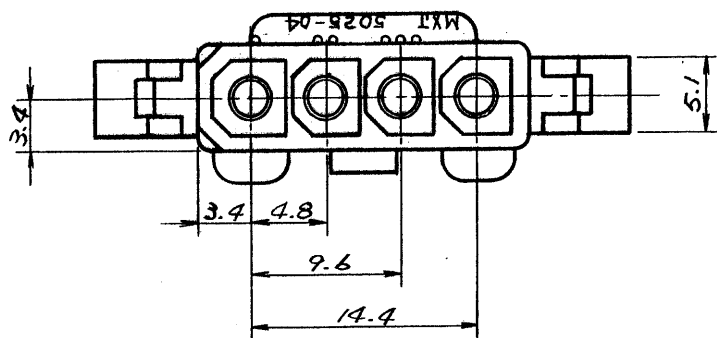


パネル板厚 2mm MAX

パネルスロット寸法
(SCALE 1:1)


E

D

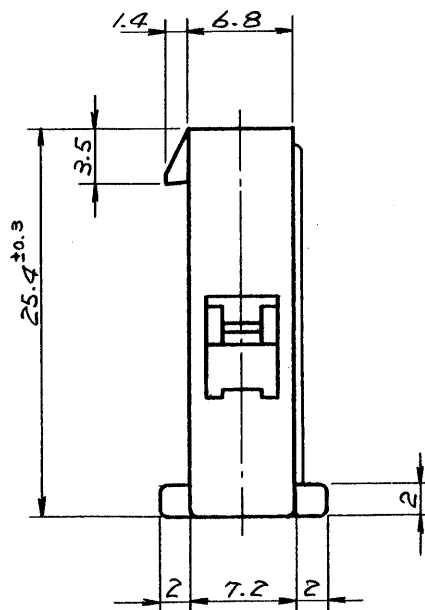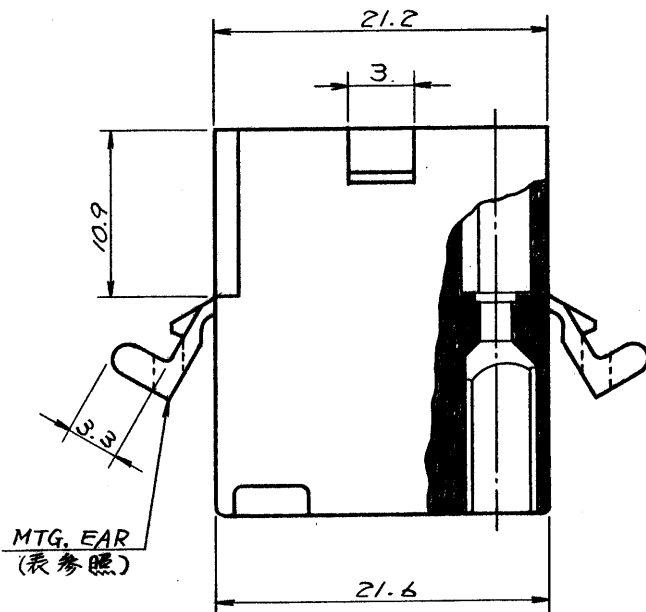

C

B

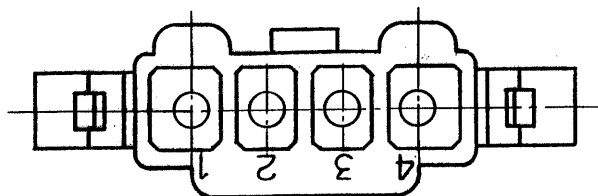

一般公差

10未満	±0.2
10以上30未満	±0.25
30以上	±0.3
角度	±3°

A

15-31-1043	5025-04P1	無
15-31-1041	5025-04P	有
EDP NO.	ENG. NO.	MTG. EAR

					公差 (Tolerances)	所要数 (Req)	DRWG. <i>Y. Awano</i> 9/27/77	
					.000 → ±0.005 .00 → ±0.05		DSN'D <i>M. ENDO</i> 10/21/77	
					.0 → ±0.1 . → ±0.3		CHK'D <i>U. Shiraishi</i>	
					材料 (MAT'L)	MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	APP'D <i>W. M. S.</i>	
E	REVISED	ECN NO. 1499	11/30/79	KH	NYLON66, 94V-2		molex	
D	ADDED -04P1 ECN NO. 917	9/5/78			熱処理 (H.T.)			
C	REMOVED "X" ECN NO. 748	3/8/78			HRc — //			
B	リブ、パネルスロット、サキット NO.	12/9/77			仕上げ (Finish)	No. SD-5025-04P*		REV. E
A	REVISED		10/28/77		— //			
O	PROPOSED		9/27/77		Scale 2/1	名称 (Name)		
記号 (LTR)	変更内容 (Rev.)		Date	Name	MINI. FIT CONN. 4POS. PLUG HSG.			