

THIS DRAWING IS UNPUBLISHED.





RELEASED FOR PUBLICATION

20

ALL RIGHTS RESERVED.

20

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
FT	0		A9	REVISED PER ECO-14-009593	01JUL2014	NK

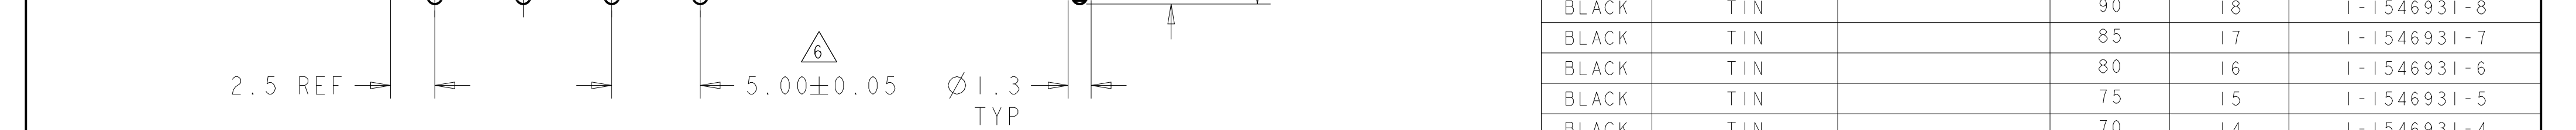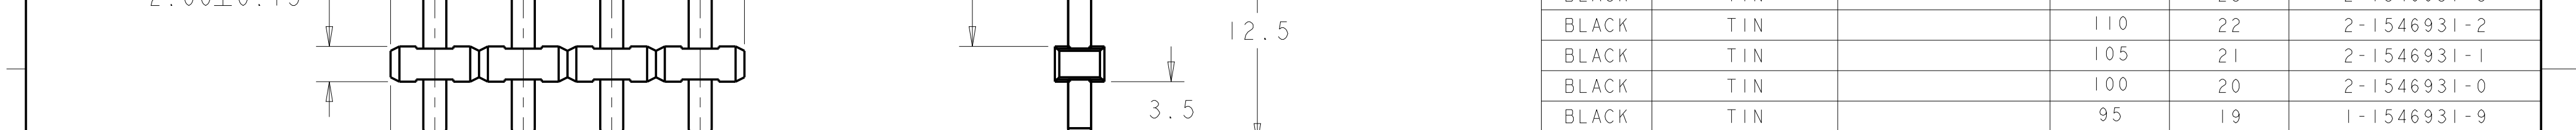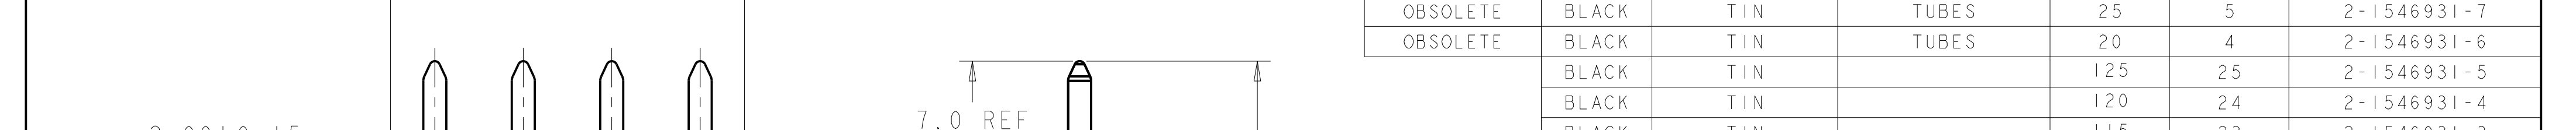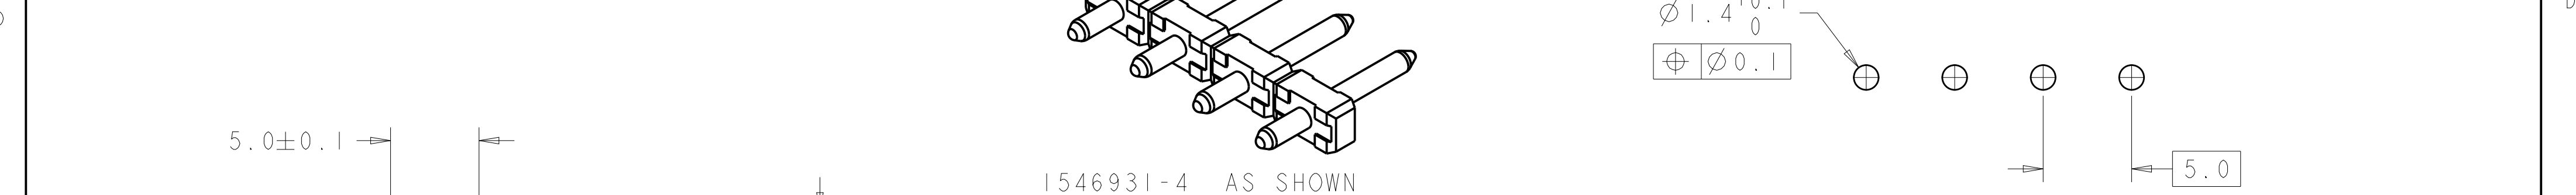

1 MATERIALS AND FINISH:
HOUSING: PA 6-6, UL 94-V0, COLOR: SEE TABLE.
TEMPERATURE RATING OF 260°C AT 1 MINUTE.
TERMINAL: BRASS, TIN PLATED.


2. SUITABLE FOR 1,6-2,4mm PC BOARD THICKNESS.

3. END-TO-END STACKABLE WITHOUT LOSS OF CENTERLINE SPACING.

4. RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC. FILE N° E60677.

5. IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.

6 NOT CUMULATIVE TOLERANCE.

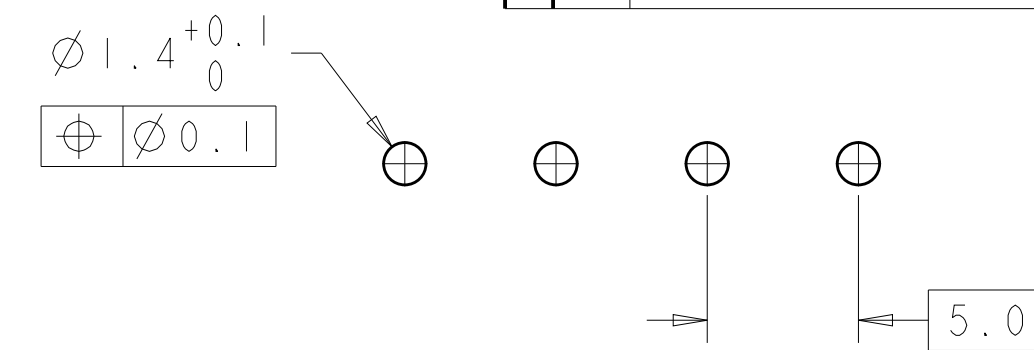

RECOMMENDED PC BOARD LAYOUT

PRELIMINARY	BLACK	TIN	TAPE AND REEL	55	11	3-1546931-5
PRELIMINARY	BLACK	TIN	TAPE AND REEL	45	9	3-1546931-4
	GRAY	TIN	-	45	9	3-1546931-3
	BLACK	TIN	TAPE AND REEL	15	3	3-1546931-2
PRELIMINARY	BLACK	TIN	TAPE AND REEL	10	2	3-1546931-1
OBSOLETE	BLACK	0.254um GOLD	-	10	2	3-1546931-0
	BLACK	TIN	TAPE AND REEL	25	5	2-1546931-9
	BLACK	TIN	TAPE AND REEL	20	4	2-1546931-8
OBSOLETE	BLACK	TIN	TUBES	25	5	2-1546931-7
OBSOLETE	BLACK	TIN	TUBES	20	4	2-1546931-6
	BLACK	TIN		125	25	2-1546931-5
	BLACK	TIN		120	24	2-1546931-4
	BLACK	TIN		115	23	2-1546931-3
	BLACK	TIN		110	22	2-1546931-2
	BLACK	TIN		105	21	2-1546931-1
	BLACK	TIN		100	20	2-1546931-0
	BLACK	TIN		95	19	1-1546931-9
	BLACK	TIN		90	18	1-1546931-8
	BLACK	TIN		85	17	1-1546931-7
	BLACK	TIN		80	16	1-1546931-6
	BLACK	TIN		75	15	1-1546931-5
	BLACK	TIN		70	14	1-1546931-4
	BLACK	TIN		65	13	1-1546931-3
	BLACK	TIN		60	12	1-1546931-2
OBSOLETE	BLACK	TIN		55	11	1-1546931-1
	BLACK	TIN		50	10	1-1546931-0
	BLACK	TIN		45	9	1546931-9
	BLACK	TIN		40	8	1546931-8
	BLACK	TIN		35	7	1546931-7
	BLACK	TIN		30	6	1546931-6
	BLACK	TIN		25	5	1546931-5
	BLACK	TIN		20	4	1546931-4
	BLACK	TIN		15	3	1546931-3
	BLACK	TIN		10	2	1546931-2
	COLOR	PLATING	PACKAGING	A REF	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.3
1 PLC ±.25
2 PLC ±.25
3 PLC ±.25
4 PLC ±.25
ANGLES ±2°
FINISH

APVD
S. WELDON
CHK
C. RICHARD
APVD
C. RICHARD

30JAN2004
30JAN2004
30JAN2004

PRODUCT SPEC
108-20166
APPLICATION SPEC
114-20079
WEIGHT
-

TE Connectivity

NAME
TERMINAL BLOCK, PIN HEADER,
UNSHROUDED, HIGH TEMPERATURE,
5.0mm PITCH

SIZE
A200779

CAGE CODE
C-1546931

DRAWING NO
-

RESTRICTED TO
-

SCALE
4:1

SHEET
1

OF
2

REV
A9

1471-9 (3/11)

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

D

D

C


C

B


B

A

A

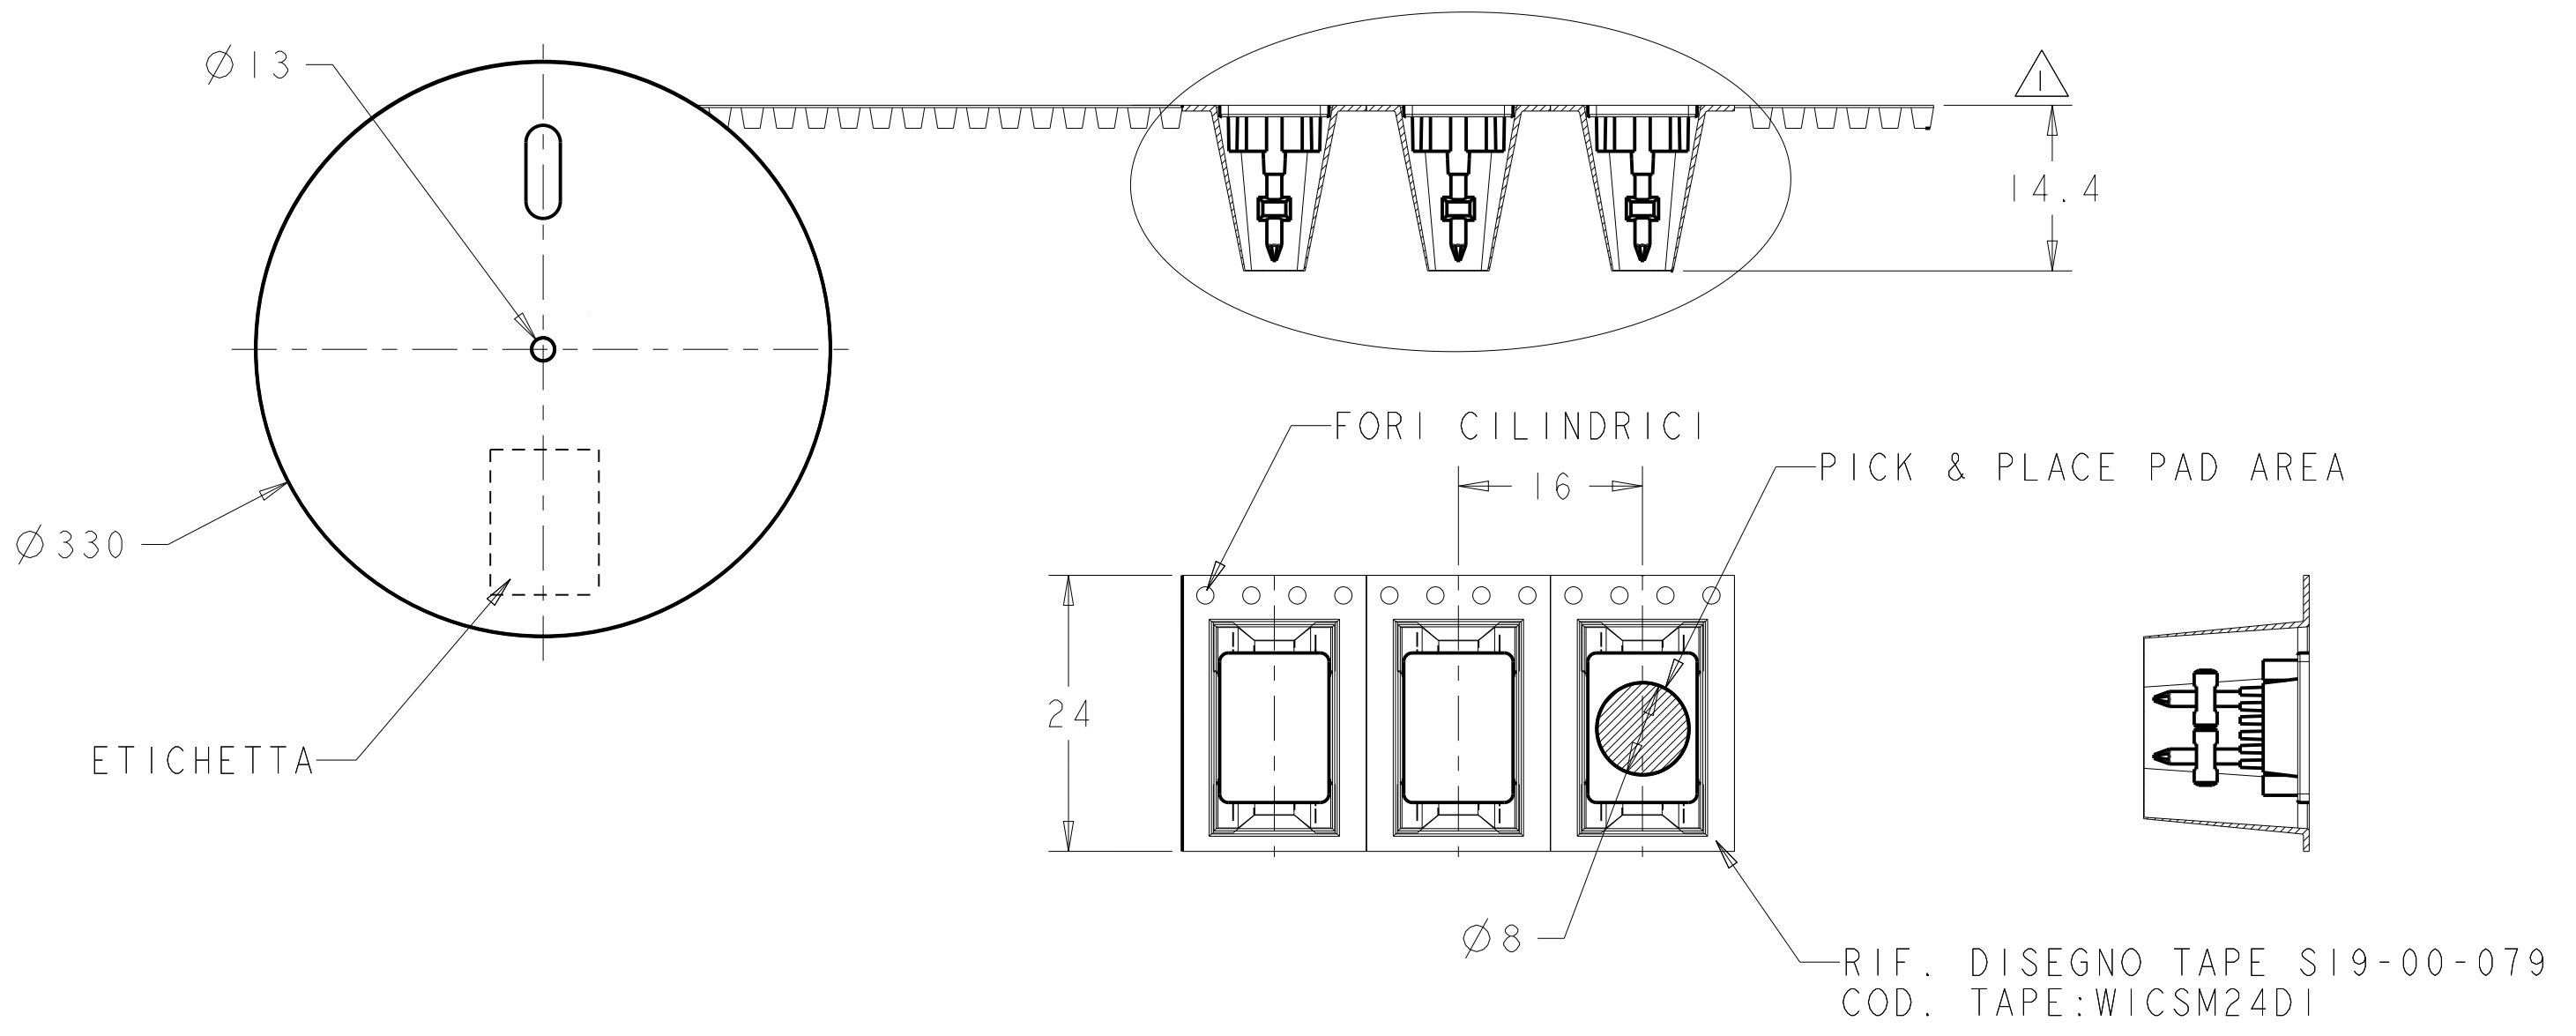

NOTE:
300 PCS PER REEL

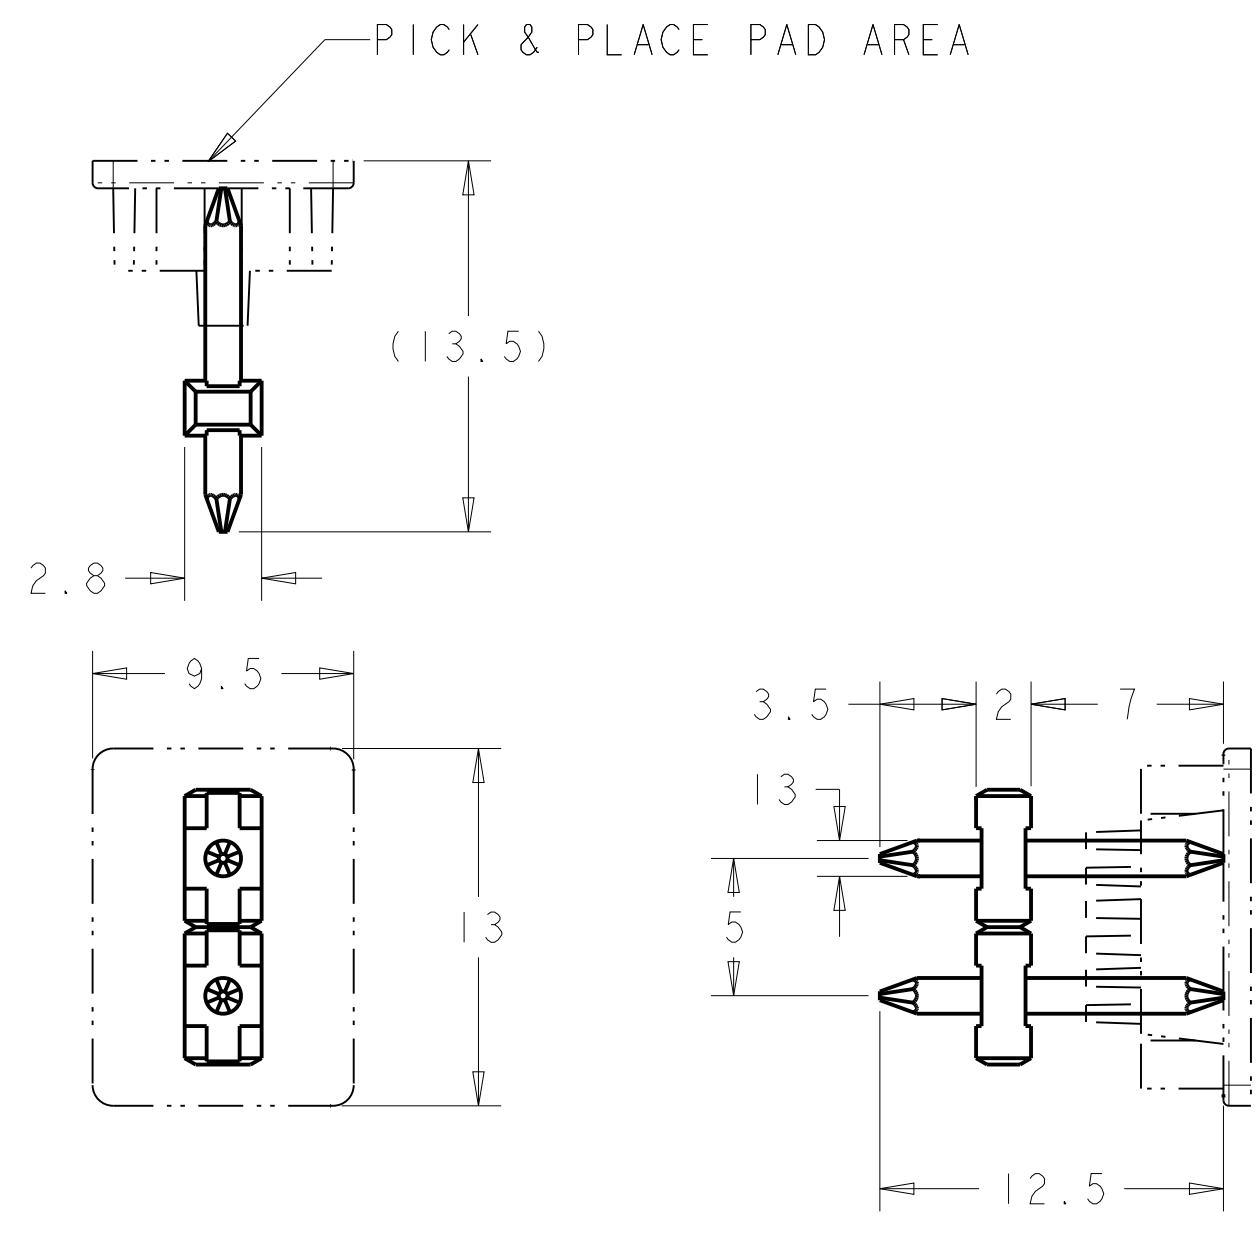

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	30 JAN 2004	 TE Connectivity		
		CHK	30 JAN 2004			
		APVD	30 JAN 2004			
		APVD	30 JAN 2004			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm				TERMINAL BLOCK, PIN HEADER, UNSHROUDED, HIGH TEMPERATURE, 5.0mm PITCH		
				SIZE		
				CAGE CODE		
				DRAWING NO		
				RESTRICTED TO		
MATERIAL				A200779C-1546931		
				SCALE		
				4:1		
				SHEET		
				2 OF 2		
				REV		
				A9		