

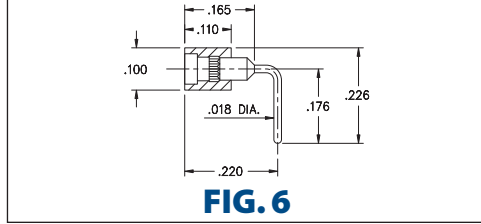
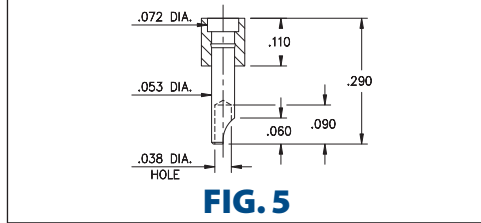
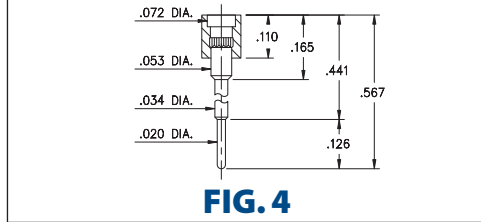
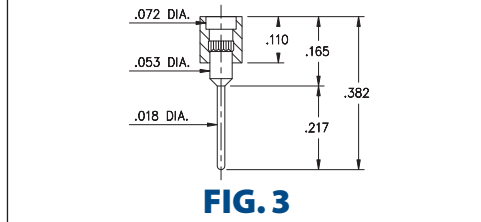
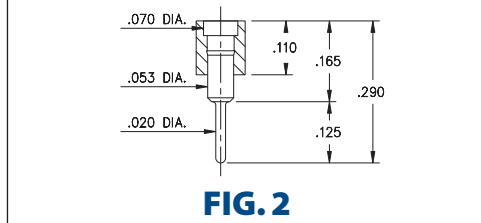


SPRING-LOADED CONNECTORS

SERIES 319, 330, 399 • .100" GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE ROW STRIPS

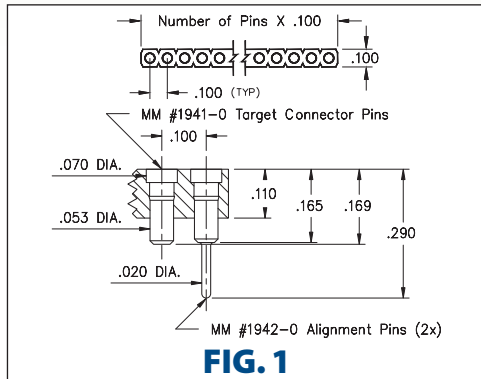

- Series 319, 330 and 399 Spring Target Connectors, supplied in single row strips
- Spring Target Connectors present a large flat surface for making contact with our standard .042" dia. spring pin plungers. The target connectors provide an excellent gold-plated conductive path back to the board mounted spring pin connector
- Target connectors use MM #1938, #1940, #1941, #1942 and #3024 pins. See page 218 for details
- Insulators are high temperature thermoplastic

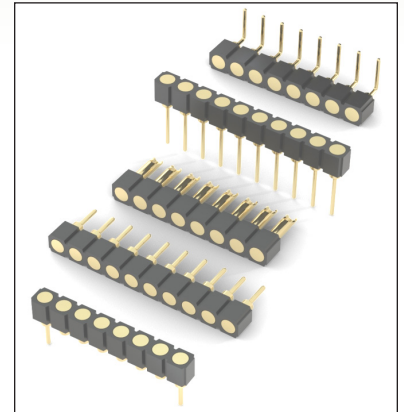

ORDERING INFORMATION

FIG. 1	Series 319...041 Surface Mount w/ Alignments Pins
	319-10-1__-30-041000 Specify number of pins 03-64
FIG. 2	Series 319...001 Standard Solder Tails
	319-10-1__-00-001000 Specify number of pins 01-64
FIG. 3	Series 319...002 Long Solder Tails
	319-10-1__-00-002000 Specify number of pins 01-64
FIG. 4	Series 319...005 Elevated with Solder Tails
	319-10-1__-00-005000 Specify number of pins 01-64
FIG. 5	Series 330...240 Solder Cups
	330-10-1__-00-240000 Specify number of pins 01-64
FIG. 6	Series 399...008 Right Angle Solder Tails
	399-10-1__-10-008000 Specify number of pins 01-64
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 5px; background-color: #c8e6c9;">RoHS-2 2011/65/EU</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px;">XX=Plating Code See Below</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px;">For Electrical, Mechanical & Environmental Data, See page 264</div> </div>	
SPECIFY PLATING CODE XX=	10 ◆
Pin Plating	10 μ" Au