

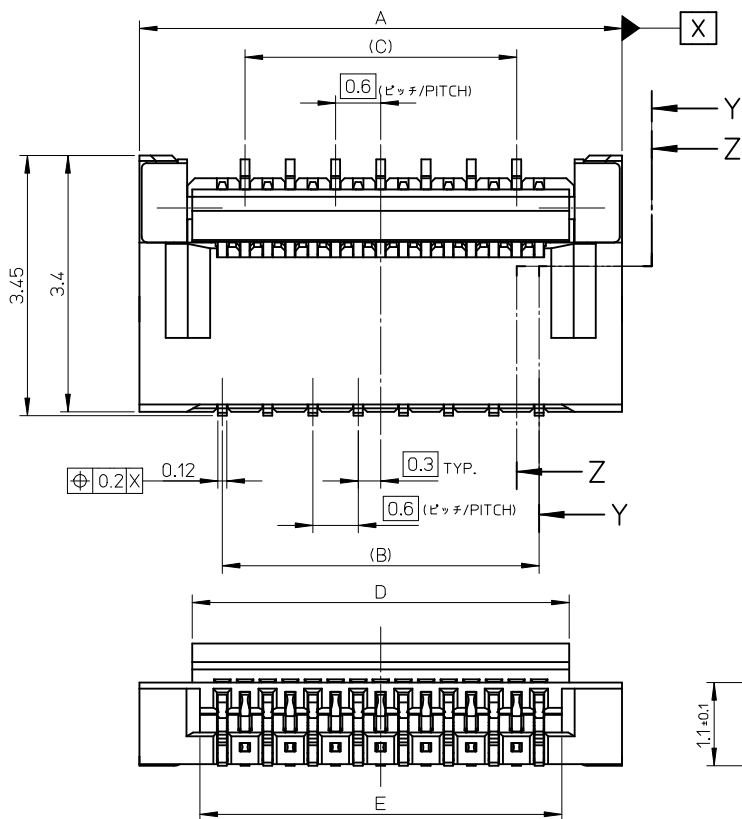



SECTION Z-Z

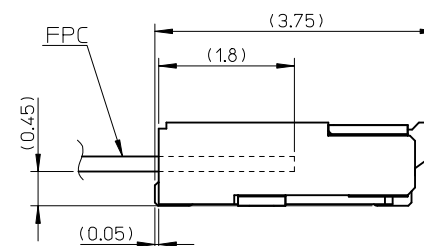

SECTION Y-Y

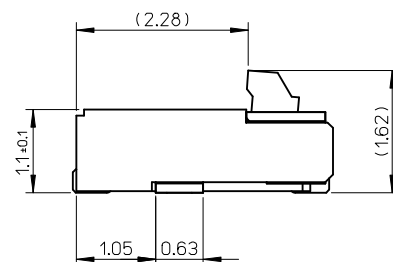

ACTUATOR CLOSE

部品構成

- ハウジング・・・材質：耐熱性樹脂 黒色 UL94V-0
HOUSING MATERIAL :HEAT RESISTANT POLYMER BLACK UL94-V0
- 奇数ターミナル・・・材質：銅合金
ODD TERMINAL MATERIAL :COPPER ALLOY
処理：ニッケル下地部分金メッキ（接触部及びテール部）
FINISH :PARTLY GOLD(CONTACT, TAIL) OVER NICKEL PLATING
- 偶数ターミナル・・・材質：銅合金
EVEN TERMINAL MATERIAL: COPPER ALLOY
処理：ニッケル下地部分金メッキ（接触部及びテール部）
FINISH :PARTLY GOLD(CONTACT, TAIL) OVER NICKEL PLATING
- アクチュエータ・・・材質：耐熱性樹脂 灰色 UL94V-0
ACTUATOR MATERIAL :HEAT RESISTANT POLYMER GRAY UL94-V0
- ネイル・・・材質：銅合金
NAIL MATERIAL: COPPER ALLOY
処理：ニッケル下地すずめっき
FINISH :TIN OVER NICKEL PLATING

9.0	9.2	7.8	8.4	10.6	501616-2975	501616-2940	29
8.4	8.6	7.2	7.8	10.0	501616-2775	501616-2740	27
7.8	8.0	6.6	7.2	9.4	501616-2575	501616-2540	25
6.0	6.2	4.8	5.4	7.6	501616-1975	501616-1940	19
E	D	(C)	(B)	A	EMBOSSD TAPE ORDER No.		MATERIAL NO. CIRCUIT

REVISED EC NO: J2015-1263 DRWN:Y.TAKAHASHI 04/2015/03/27 CHKD:K.TAKAHASHI 2015/03/27 APPR: YNOGAWA 2015/03/30	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 15:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		0.25 UNDER		± 0.03	DRAWN BY	DATE	TITLE 0.3 FPC CONN. ZIF E/O HSG ASSY (H=1.1)		
		0.25 OVER 0.5 UNDER		± 0.05	K.TAKAHASHI	2006/07/28			
		0.5 OVER 1.0 UNDER		± 0.1	CHECKED BY	DATE			
		1.0 OVER 10 UNDER		± 0.2	H.HIRATA	2006/07/28	DOCUMENT NO. molex SD-501616-005		
		10 OVER 30 UNDER		± 0.25	APPROVED BY	DATE			
		30 OVER		± 0.3	M.SASAO	2006/07/28			
		ANGULAR ±3 °			MATERIAL NO.		DOCUMENT NO.		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-501616-005		1 OF 2	
	REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			


10 9 8 7 6 5 4 3 2 1

NOTES

1. 製品 (501616-**40) の詳細寸法については、
図面 SD-501616-005 をご参照下さい。
IN THE PACKAGE, PART NO. 501616-**40 DETAILED DIMENSIONS.
REFER TO SALES DRAWING NO. SD-501616-005.

2. 梱包数量 : 3000個/リール
NUMBER OF CONNECTORS : 3000 PCS/REEL

3. リードテープ長さ
LEAD TAPE LENGTH

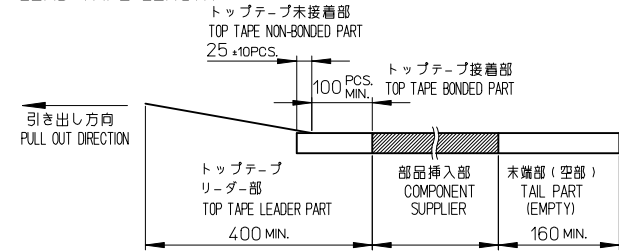

4. 材料


キャリアテープ : ポリスチレン (PS)
トップテープ : PET, PE, PEF
リール : ポリスチレン (PS) <リサイクル材を含む>

MATERIAL

CARRIER TAPE : POLYSTYRENE (PS)
TOP TAPE : PET, PE, PEF
REEL : POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

5. ELV及びRoHS適合品

ELV AND RoHS COMPLIANT

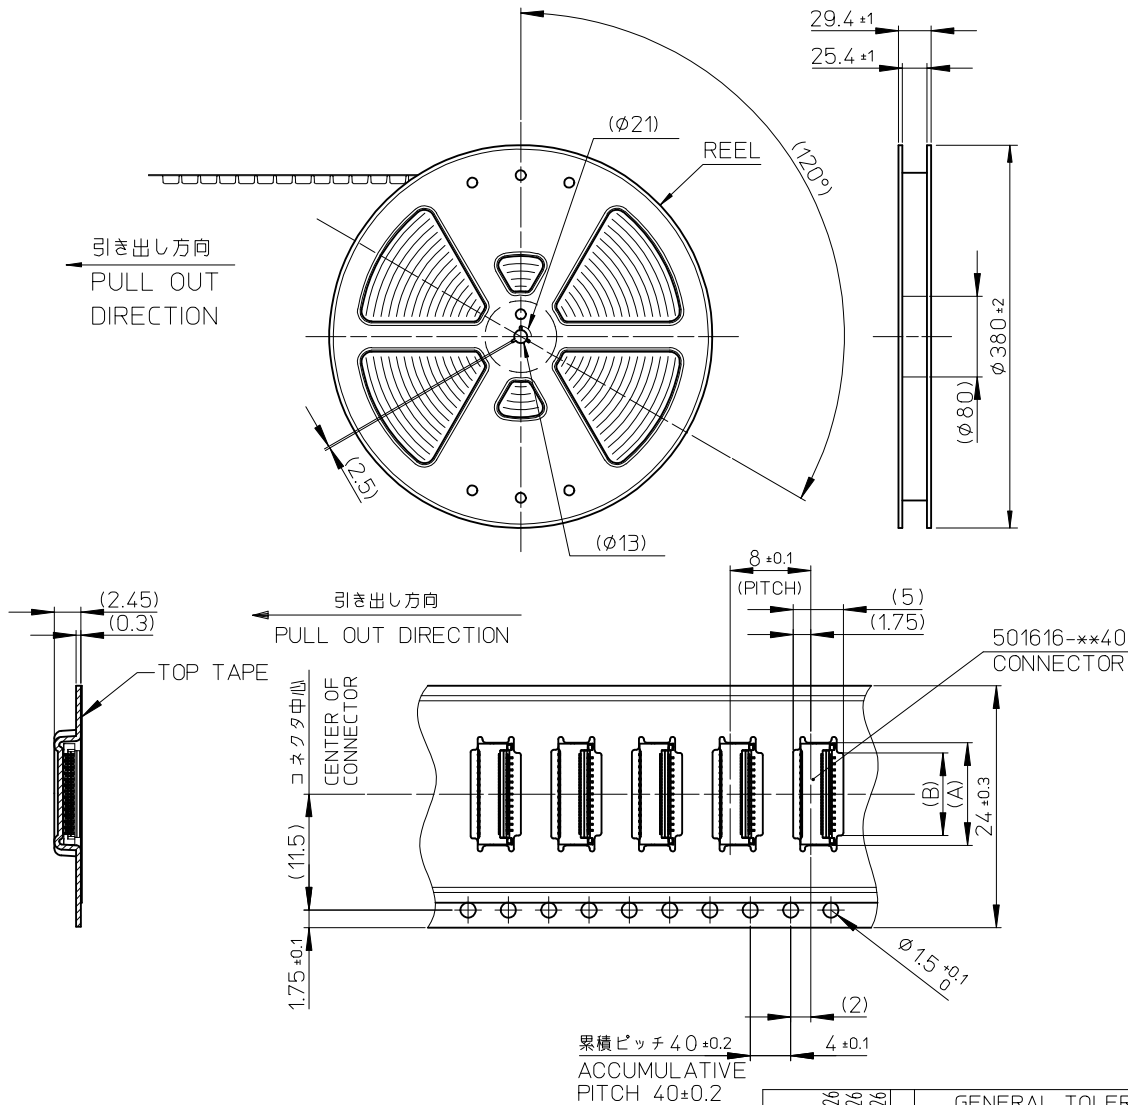

エンボステープ内の製品の向き
DIRECTION OF CONNECTOR IN
EMBOSSED TAPE

8.8	10.8	501616-2975	29
8.2	10.2	501616-2775	27
7.6	9.6	501616-2575	25
5.8	7.8	501616-1975	19
B	A	EMBOSSD PACKAGE オーダー番号 ORDER No.	極数 CIRCUIT

REVISED	EC NO. J2009-1784		2009/01/26		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION	
	DRWN:MKAWABATA		2009/01/26		10 UNDER		± ---		DRAWN BY K. TAKAHASHI		DATE 2006/7/28		TITLE 0.3 FPC CONN. B/F EMBSTP PKG H=1.1	
	CHKD:HSHI MOYAMA		2009/01/26		10 OVER 30 UNDER		± ---		CHECKED BY H. HIRATA		DATE 2006/7/28			
	APPR:HSHI MOYAMA		2009/01/26		30 OVER		± ---		APPROVED BY M. SASAO		DATE 2006/7/28		MOLEX MOLEX INCORPORATED	
					ANGULAR		± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		SD-501616-006		1 OF 1	
A	REV									THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				