



REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/30/2007

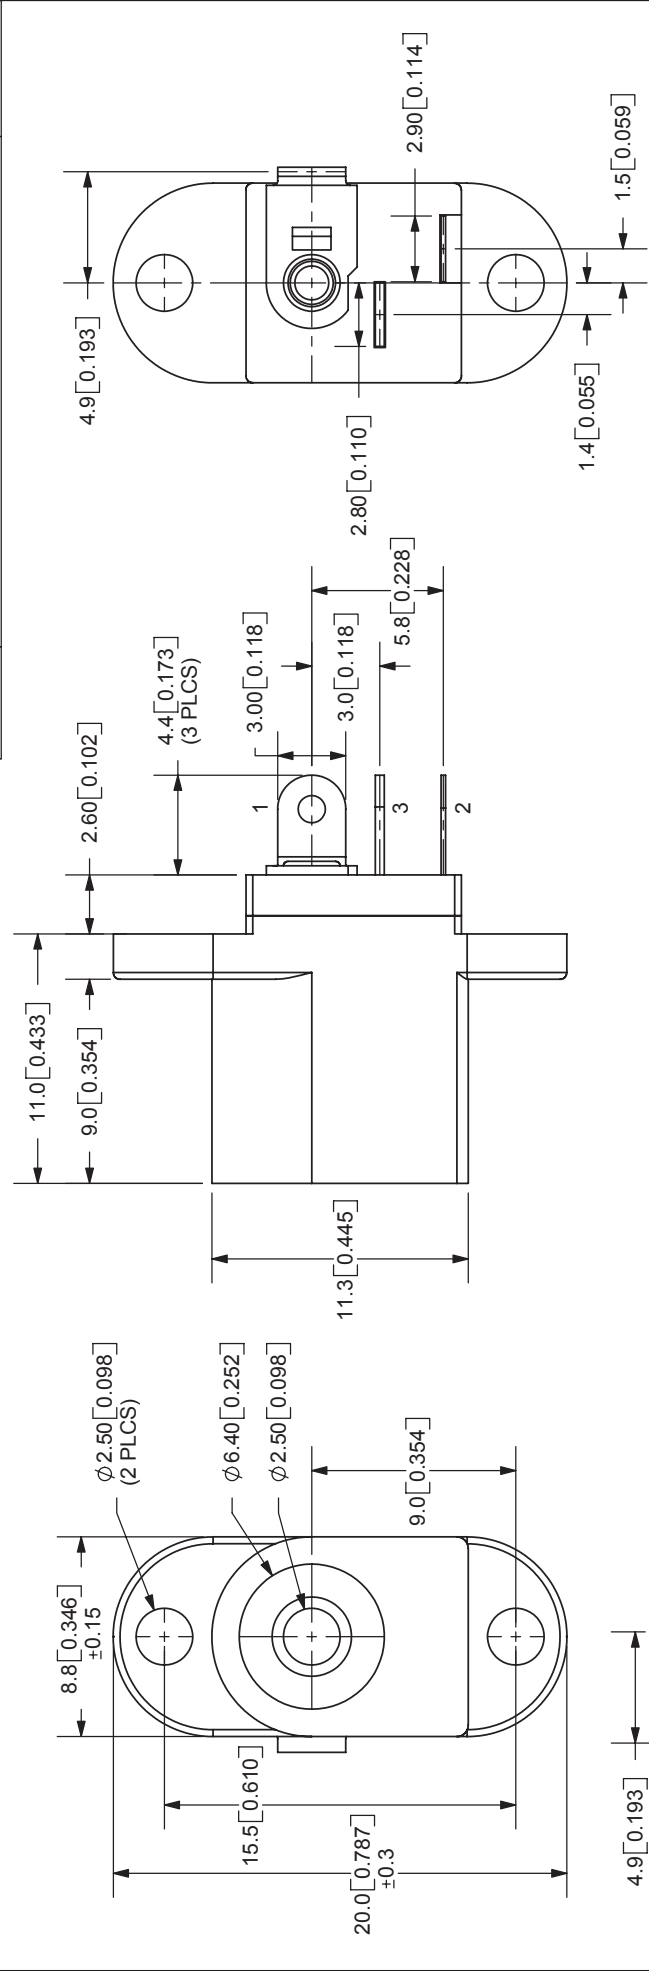

SCALE: 2:1

RoHS

TOLERANCE:
X.X±0.2mm
X.XX±0.1mm
X.XXX±0.05mm

CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

SPECIFICATIONS:
RATING: 16V DC @ 2.5A
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

MODEL NO.	PJ-038B
SCHEMATIC	
CENTER PIN DIAMETER 2.5mm Dia.	
PC FILE NAME:	PJ-038B
COPYRIGHT 2007 BY CUI INC.	
CENTER PIN	Copper
TERMINAL 1	Brass
TERMINAL 2	Copper Alloy
TERMINAL 3	Brass
BODY	PBT
MATERIAL	PLATING
Copper	Nickel
Brass	Tin
Copper Alloy	Tin
Brass	Tin
PBT	
TITLE:	DC POWER JACK
REV:	A
PART NO.	PJ-038B
UNITS:	MM [INCHES]
DRAWN BY:	ZRJ
APPROVED BY:	
SCALE:	1:0.333333