


REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/30/2007

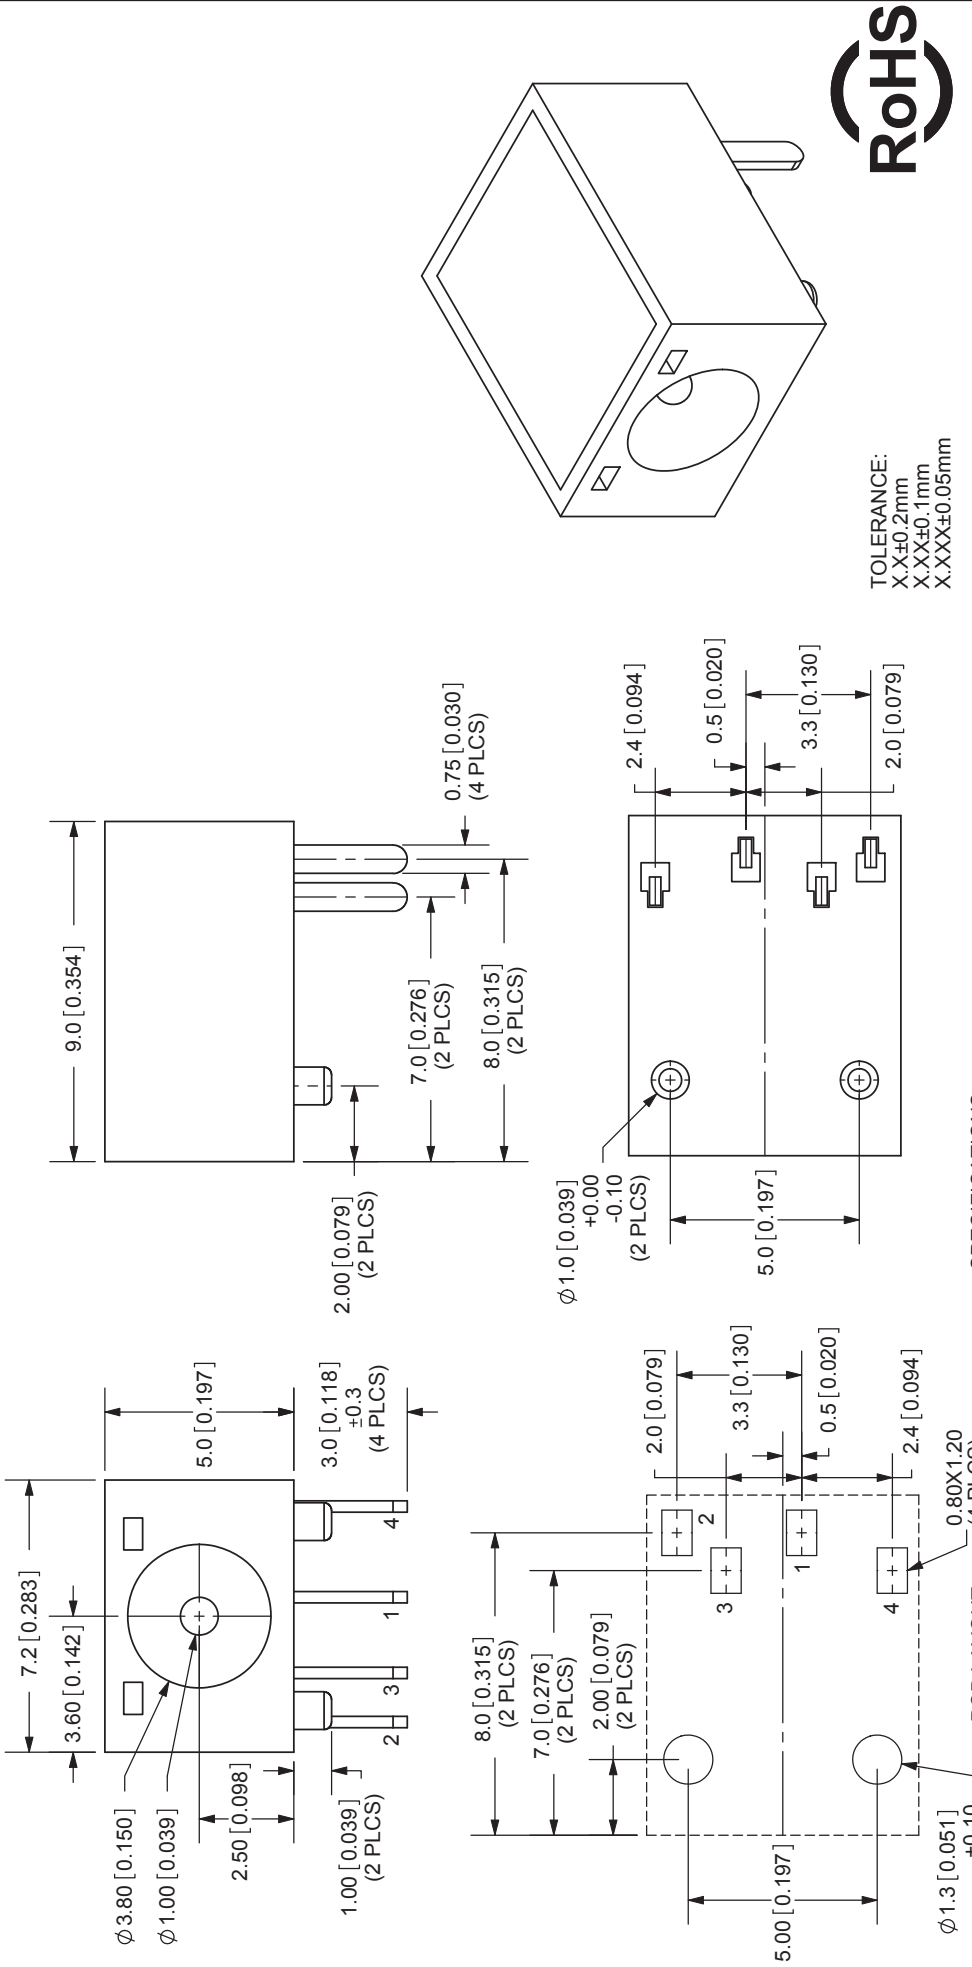

RoHS

TOLERANCE:
X.X $\pm$ 0.2mm
X.XX $\pm$ 0.1mm
X.XXX $\pm$ 0.05mm

CUI INC

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

REV: A

TITLE: DC POWER JACK

PART NO: PJ-052C

UNITS: MM [INCHES]

APPROVED BY: ZRJ

SCALE: 5:1

SPECIFICATIONS:
RATING: 16V DC @ 2A
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

CENTER PIN	TERMINAL 1	TERMINAL 2	TERMINAL 3	TERMINAL 4	BODY	INSULATOR
Brass	Brass	Copper Alloy	Brass	Copper Alloy	PA66	PA66
Tin	Tin	Tin	Tin	Tin		

MODEL NO. PJ-052C

SCHEMATIC

CENTER PIN DIAMETER 1.00mm Dia.

PC FILE NAME: PJ-052C

COPYRIGHT 2007 BY CUI INC.