

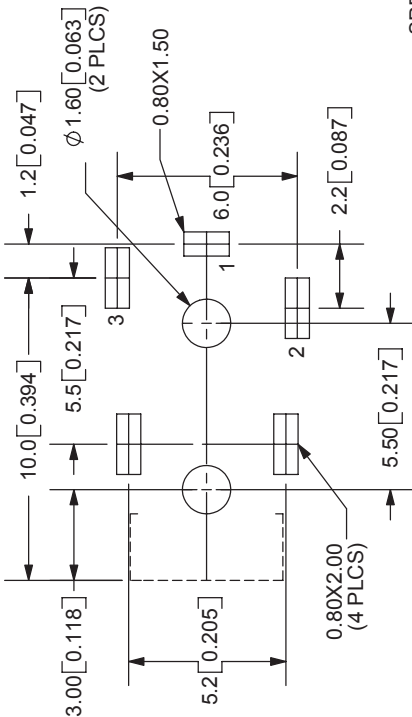
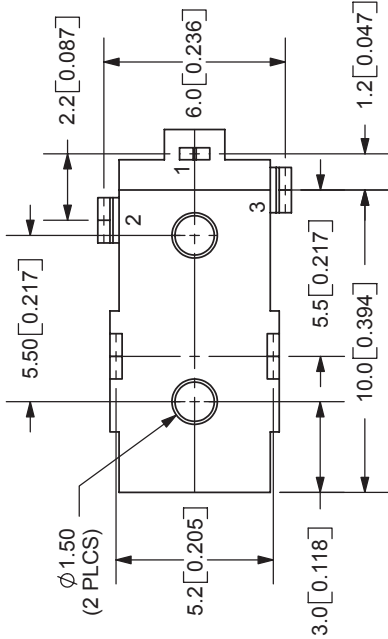
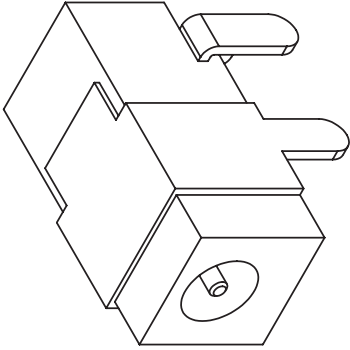
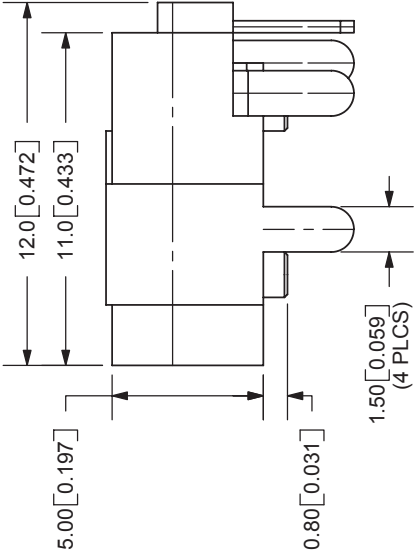


REV.	DESCRIPTION	DATE
A	NEW DRAWING	4/17/2006

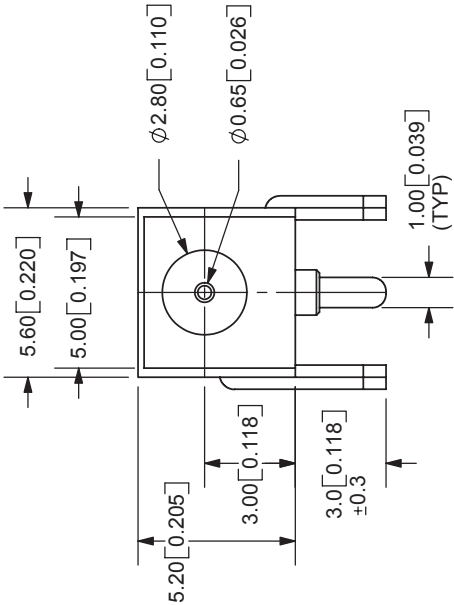

SPECIFICATIONS:
RATING: 16V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -25° ~ +85°C

PCB LAYOUT
TOP VIEW

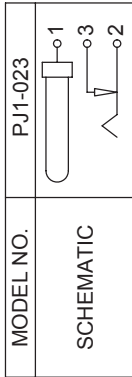

CENTER PIN DIAMETER 0.65mm Dia.



TOLERANCE:
X.X ±0.2mm
X.XX ±0.1mm
X.XXX ±0.05mm



9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE: 0.65mm DC POWER JACK, PCB MOUNT w/SHIELD	REV: A
PART NO: PJ1-023	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
SCALE: 4:1	