

Specification Status: Released

Electrical Rating

Voltage: 15Vdc MAX
Current: 100A MAX

Chip Size: 7 X 14.3mm

Leads: Nickel 1/4H
0.125mm nominal thickness

Tape: Polyester (White)
15.3mm nominal width

Marking: (Color: Green)
— Manufacturer's Mark

XX E38 — Part Identification

□□□□ — Lot Identification

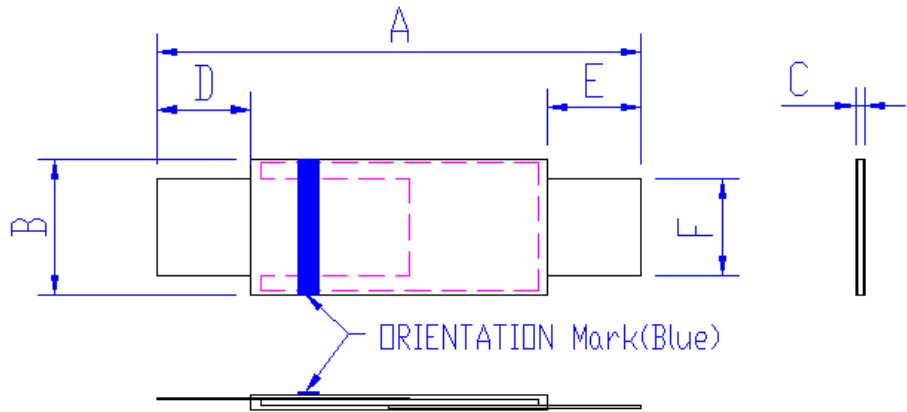


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	24.0	26.0	6.9	7.5	0.6	1.0	4.1	5.5	4.1	5.5	4.9	5.1
in*:	(0.94)	(1.02)	(0.27)	(0.30)	(0.02)	(0.04)	(0.16)	(0.22)	(0.16)	(0.22)	(0.19)	(0.20)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOLD	CURRENT TRIP LIMITS						TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION				
	AMPS 20°C HOLD		AMPS AT 0°C		AMPS AT 20°C						AMPS AT 60°C		OHMS AT 20°C	
	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MIN	MAX	MIN	MAX		
	3.8	4.4	9.7	3.8	8.3	2.8	6.1	--	5	0.013	0.026	0.013	0.037	2.5

Agency Recognitions:
Reference Documents:
Precedence:
Effectivity:
CAUTION:

UL, TUV, CSA
PS300
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information:

ROHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant

Pb-Free

