
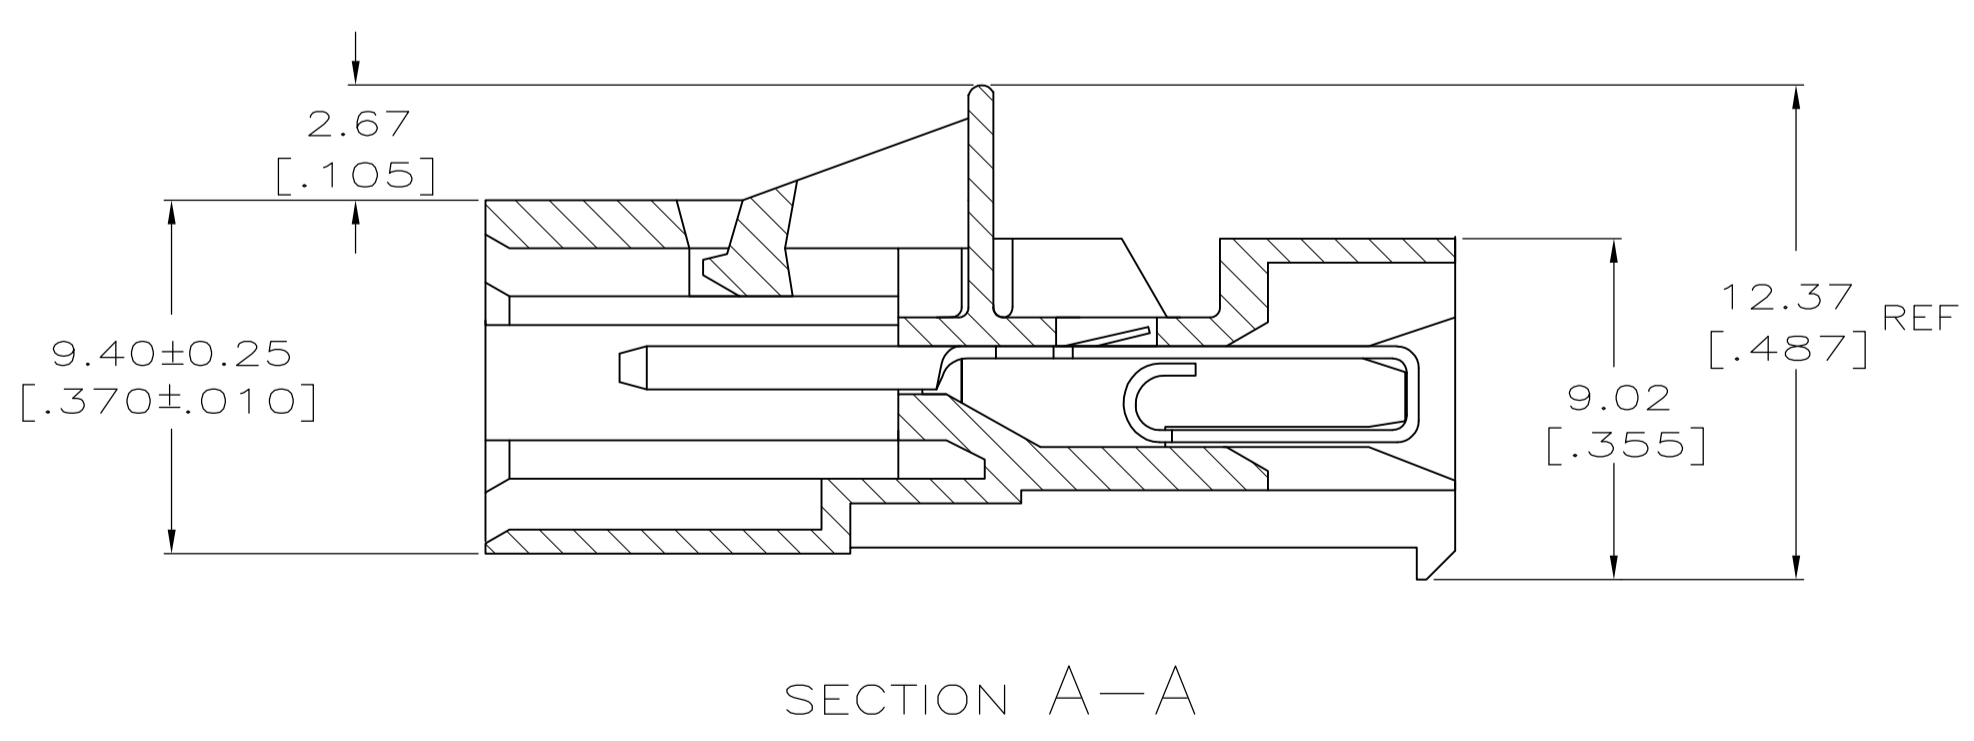
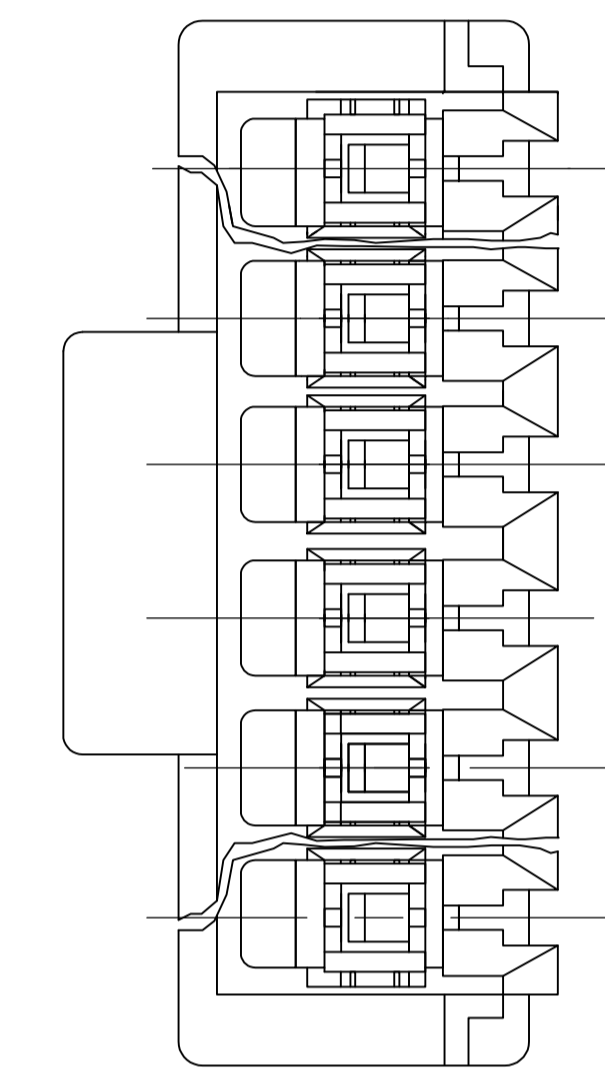
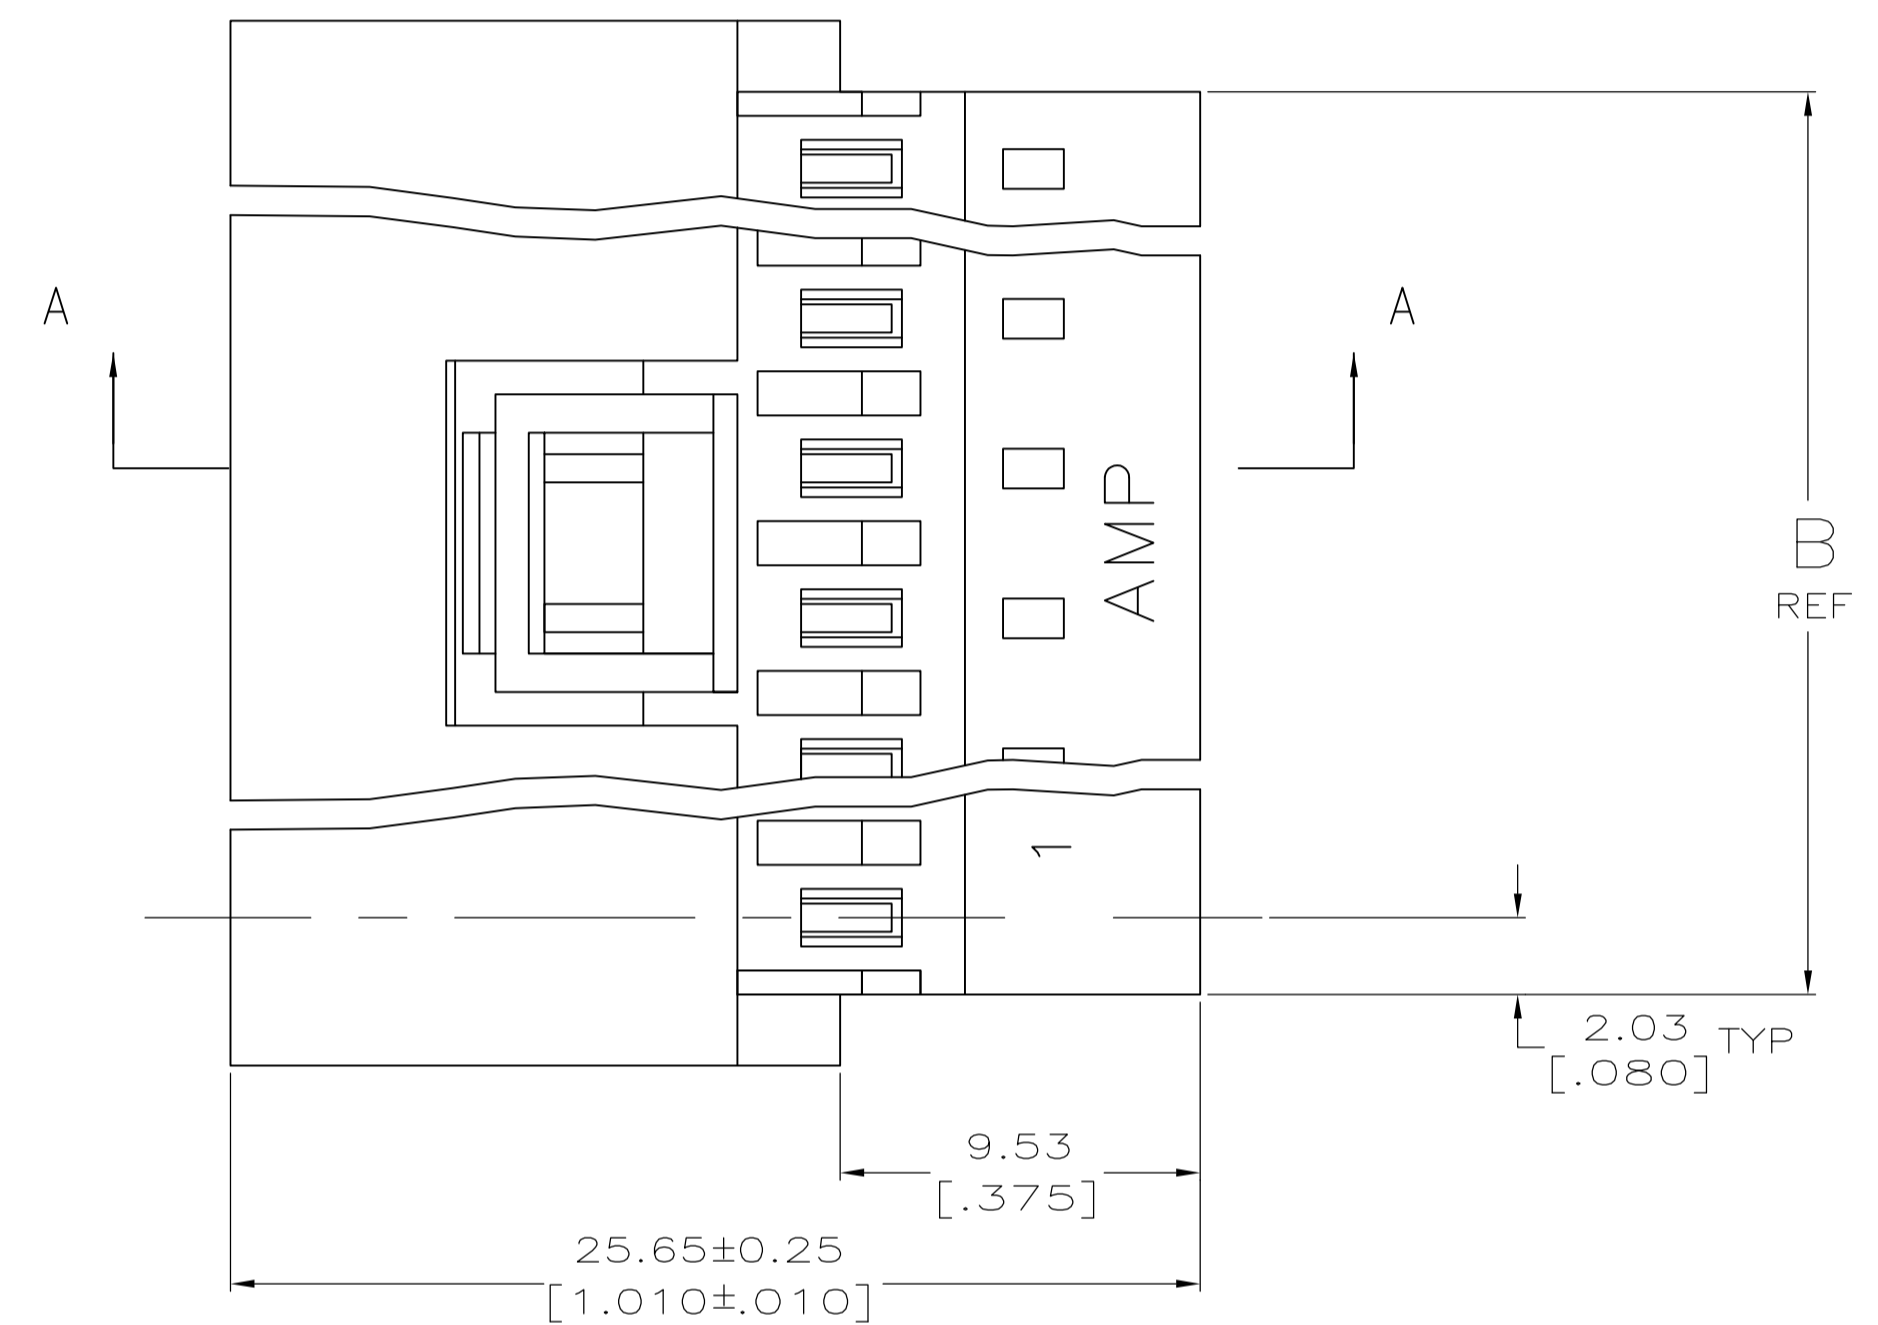


LOC		DIST		REVISIONS			
CM	0	REV	DATE	BY	CHK	APPV	
J2	REVISED PER ECR-15-006702		28JUL2015	NK		PQ	

- MATERIAL: CONNECTOR- NYLON UL94V-2 (BLUE).  
CONTACTS- 0.30 [.012] THK COPPER ALLOY  
(BRIGHT TIN-LEAD 0.00203 [.000080] MIN THK).  
(MATTE TIN 0.00203 [.000080] MIN THK  
FOR CONTACTS 3-641439-2 THRU 5-641439-4)
- CONTACTS ACCEPT #26 AWG SOLID, FUSED STRANDED OR STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- HOUSING FEATURES: CLOSED END.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

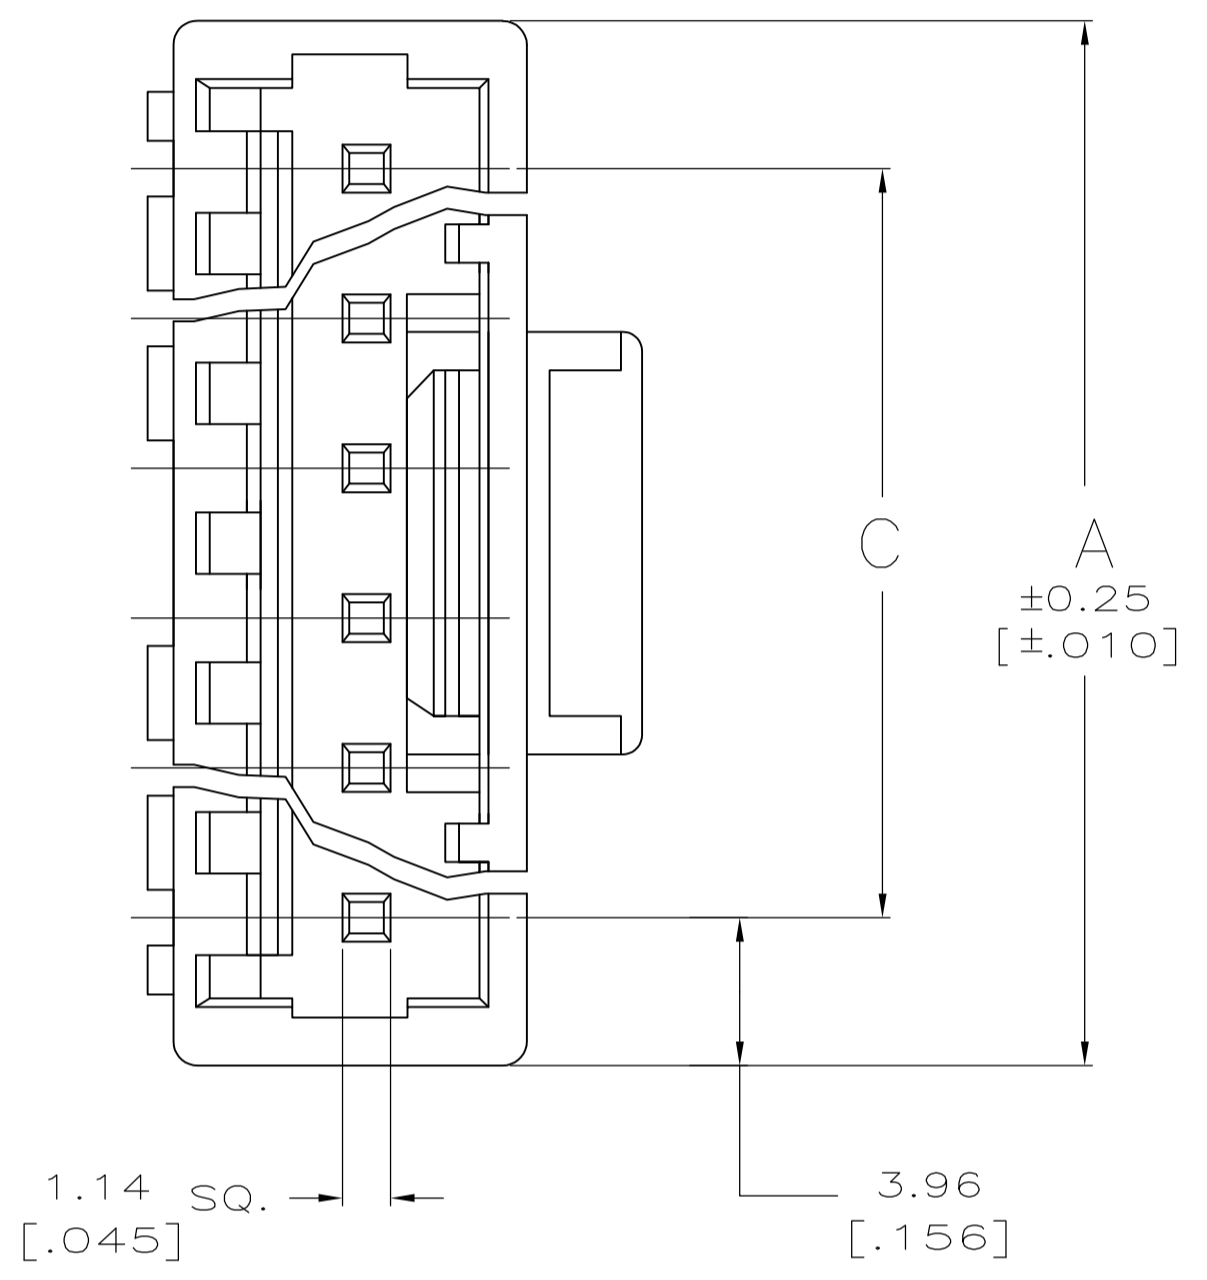

FINISH	C	B	A	NO. OF CIRCUITS	PART NUMBER
TIN	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	5-641439-4
	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-641439-5
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-641439-2
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-641439-9
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-641439-6
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-641439-4
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-641439-3
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-641439-2
TIN-LEAD	91.14 [3.588]	95.20 [3.748]	99.06 [3.900]	24	2-641439-4
	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	1-641439-5
	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	1-641439-2
	31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	641439-9
	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	641439-6
	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	641439-4
	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	641439-3
	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	641439-2
△ SUPERSEDED					
△ SUPERSEDED					
OBSOLETE					

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN K. SALMON 10-22-91  
CHK R. SWING 10-22-91

DIMENSIONS: mm [INCHES] TOLERANCES UNLESS OTHERWISE SPECIFIED:  
0 PLC ± -  
1 PLC ± -  
2 PLC ± 0.13 [.005]  
3 PLC ± -  
4 PLC ± -  
ANGLES ± -

MATERIAL: SEE NOTE 1 FINISH: SEE NOTE 1 WEIGHT: -

CUSTOMER DRAWING SCALE: 5:1 SHEET 1 OF 1 REV J2

STE TE Connectivity  
MTA-156  
POSTED CONNECTOR ASSEMBLY,  
26 AWG

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 641439