





$\phi 3.50 [0.138] \pm 0.1$
 $\phi 10.00 [0.394] \pm 0.1$

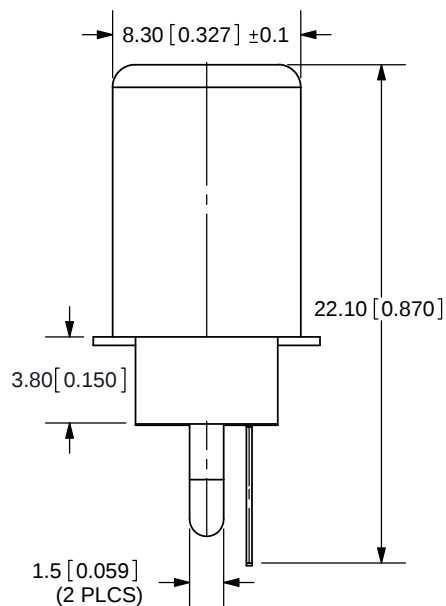

10.70 $\pm$ 0.20 [0.421 $\pm$ 0.008]

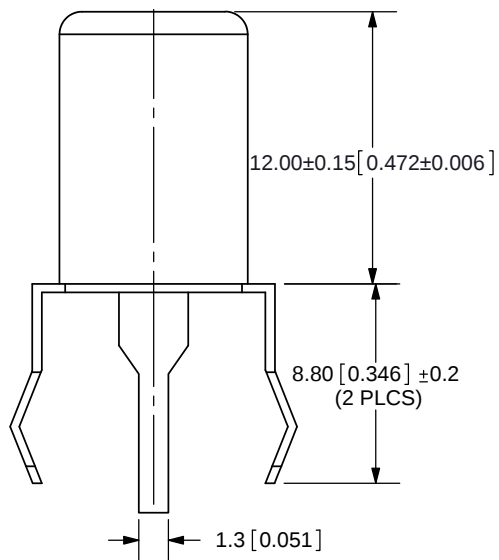

SPECIFICATIONS:
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -20 ~ 85°C

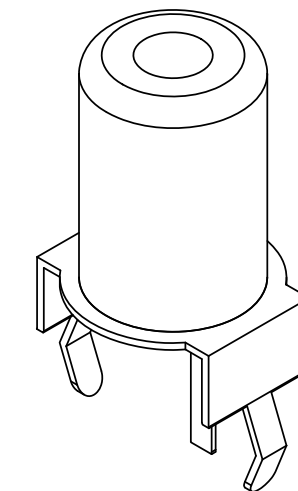


COLOR INDEX

PART NO.	COLOR
RCJ-021	Black
RCJ-022	Red
RCJ-023	White
RCJ-024	Yellow
RCJ-025	Blue
RCJ-026	Green
RCJ-027	Orange

TOLERANCE:
 $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED



PCB LAYOUT TOP VIEW

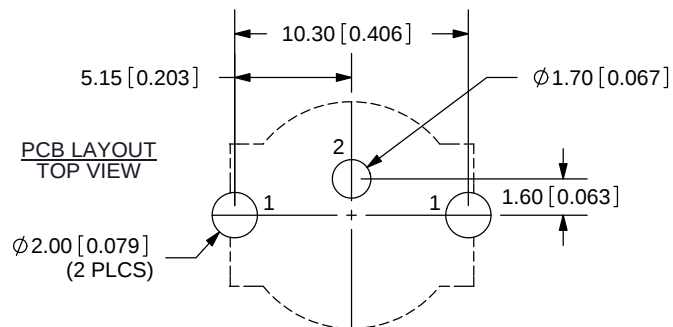

MODEL NO.	RCJ-02X
SCHEMATIC	

	MATERIAL	PLATING
SHELL	Brass	Nickel
MOUNTING BRACKET	Iron	Tin
PIN	Brass	Tin
INSULATOR	PBT	see color index

TITLE: RCA Jack, Metal, Vertical, PCB Mount	REV: B
PART NO. RCJ-02X	UNITS: MM [INCHES]
DRAWN BY: RDS	APPROVED BY:
SCALE: 3:1	

PC FILE NAME:
RCJ-02X

COPYRIGHT 2013 BY CUI INC.



CUI INC

20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com